


tripla coustics

YOUR SILENT PARTNER

TECHNICAL DATA SHEET

type Z wall-ceiling

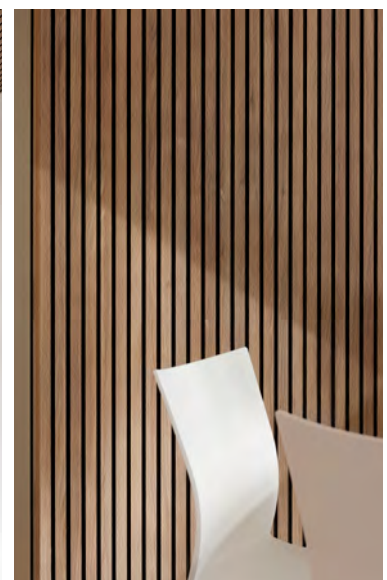

type Z wall-ceiling

MATERIAL COMPOSITION

Top layer High-quality HPL finish (EN438) or real wood veneer

Core Acoustic black moisture repellent MDF 16 mm

Backing Backing layer in HPL finish (EN438) or backing veneer + acoustic absorbing glass fibre tissue (on the back)

WEIGHT 11,0 kg/m²

PERFORATION

Type Z perforations of 7.5%: front vertical grooves of 8.5 mm and blades of 23.5 mm in combination with sideways slits in the acoustic core

Blade/groove: 23.5/8.5 mm

STD. MEAS. FULL PANEL

(half grooved long sides)
3030x1280x±18 mm (HPL)
3030x1184x±17 mm (veneer)

STD. MEAS. PLANKS

(tongue-groove long sides)
3030x192x±18 mm (HPL)
3030x128x±17 mm (veneer)



OPTIONS

Made-to-measure

on request

Cladding panel

on request


Curved wall application

radius > 0.75m: possible with plank width of 64 mm.
from radius > 3m: possible with standard plank widths 128 of 192 mm

TEST SET-UP IN LABORATORY:

TOTAL THICKNESS WALLS
88 mm

f(Hz)	T1 (s)	T2 (s)	α_s
100	12,93	6,68	0,34
125	13,05	6,39	0,37
150	11,51	4,77	0,57
200	11,84	4,18	0,73
250	10,89	3,58	0,88
315	11,12	3,15	1,06
400	10,88	3,02	1,11
500	10,86	3,24	1,01
630	11,80	3,86	0,81
800	11,94	4,22	0,72
1000	11,58	4,63	0,61
1250	10,49	4,73	0,54
1600	8,98	4,56	0,51
2000	7,67	4,20	0,51
2500	8,13	3,81	0,54
3150	4,79	3,02	0,58
4000	3,70	2,47	0,64
5000	2,74	1,87	0,81

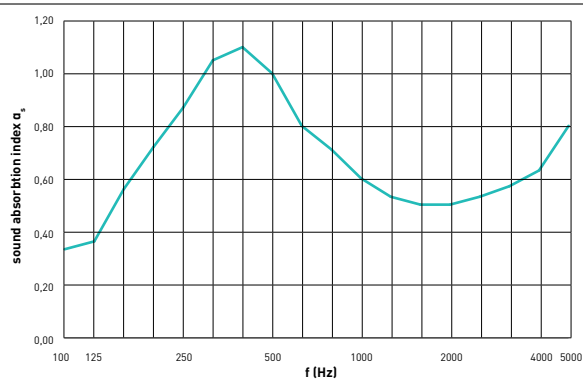


f(Hz)	α_p
125	0,45
250	0,90
500	1,00
1000	0,60
2000	0,50
4000	0,70

Total thickness	% perfo	α_w	f(Hz)	Sound class	NRC	SAA
88 mm	7,5%	0,60	LM	C	0,75	0,75
Installation	Mounted on a wooden frame with a thickness of 70mm, filled with 50mm of mineral wool with a density of 40 kg/m ³ .					
Values according to reverberation room test EN ISO 354:2003 - EN ISO 11654:1997						

TEST SET-UP IN LABORATORY:

TOTAL THICKNESS WALLS
38 mm

f(Hz)	T1 (s)	T2 (s)	α_s
100	12,23	9,20	0,10
125	10,79	7,93	0,12
150	9,82	5,95	0,25
200	9,09	5,51	0,27
250	9,36	4,61	0,41
315	9,30	3,85	0,57
400	9,26	3,46	0,68
500	9,40	3,19	0,78
630	10,04	2,98	0,88
800	9,95	2,74	0,99
1000	9,73	2,72	0,99
1250	8,92	2,75	0,94
1600	7,72	2,86	0,83
2000	6,69	2,93	0,72
2500	5,44	2,85	0,62
3150	4,32	2,52	0,61
4000	3,40	2,06	0,71
5000	2,54	1,55	0,93

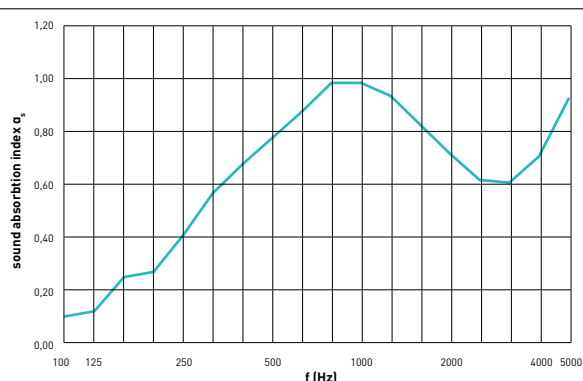

f(Hz)	α_p
125	0,15
250	0,40
500	0,80
1000	1,00
2000	0,70
4000	0,75

Total thickness	% perfo	α_w	f(Hz)	Sound class	NRC	SAA
38mm	7,5%	0,70	M	C	0,75	0,72
Installation	Mounted on a wooden frame with a thickness of 20 mm, filled with 20 mm PRIMAWOOL of 22,5 kg/m ³ .					
Values according to reverberation room test EN ISO 354:2003 - EN ISO 11654:1997						

finishes

HPL

The HPL high pressure laminates consist of layers of cellulose fibrous material combined with a decorative top layer impregnated with thermosetting resins and bonded together using a high pressure (9 Mpa = 90 kg/cm²), high temperature (150 ° C) process. All top layers are manufactured according to the European norm EN 438 I/II. The HPL top layer has a thickness of 0.9 mm and is therefore one of the highest-quality top layers on the market.


The complete technical details of HPL and the available colours and textures (more than 500 uni-colours and wood imitations) are available on request (by telephone or via e-mail).

You can also find information on www.triplacoustics.be.

STOCK HPL 2 BRANDS :

ABET LAMINATI

PFLEIDERER

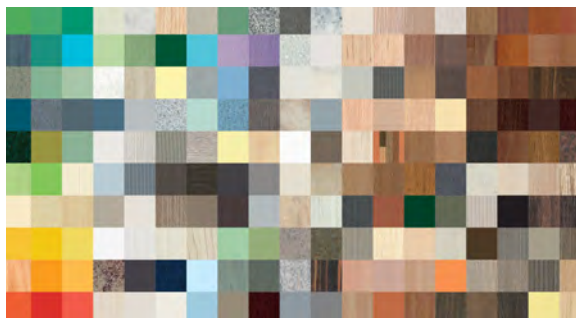

digital print

We can print your image on our acoustic panels by means of digital printing on a HPL laminate sublayer. This is carried out with a four-colour printing process.


To have a good representation of your image, the digital file provided must have a minimum size of 150 dpi in CMYK on scale 1/1.

Only vertical application due to limited scratch resistance.

veneer

DECOSPAN

Our acoustic panels are also available with a top layer in real wood veneer (choices are plain cut oak, quarter cut oak, beech, birch, walnut, ash, etc.). The panels can be delivered untreated so that the interior designer can stain or varnish them, or we can deliver them finished. Finishing options include: UV varnish, matt varnish, stain, colour oil...

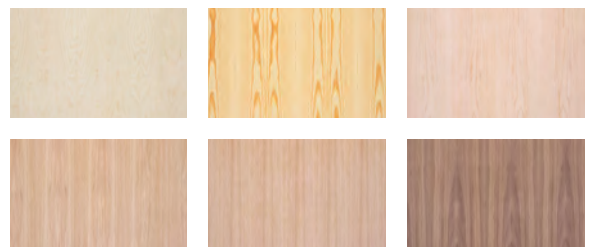

Shinnoki®

Shinnoki offers a wide choice of sturdy and high quality veneer products for architects and furniture makers to design and create stylish and distinctive interiors . Unlike standard veneered panels, Shinnoki products are ready-made for use and as easy to process as a melamine panel but with the same unique look and feel typical of real wood veneer.



lacquer

The grooved panels can be delivered in a RAL or NCS colour finished with transparent matt lacquer. This is done in-house at our production site. (the quality of the lacquer in the groove is less covering than the lacquer of the top layer).

installation grooved / full panels & planks

Fastening on single wooden battens (preferably placed horizontally)

Battens of 60x40 mm for Rockwool filling and 45x22mm for Primawool. Spacing of maximum 600mm is recommended.

Or fixing on double battens with primary vertical and secondary horizontal battens.

Fastening is done with pins/nails of type Triplacoustics impact-resistant black head RAL9005 in the grooves of the panel using a Triplacoustics mounting gun.

Type Z boards can also be mounted with black screws in the 8.5 mm wide groove.

Types Gsb and Gsw can also be fixed by rear by bonding/glueing at the back or by black screws at the front. Glueing can be done with an MS polymer adhesive sealant. First a primer is applied to the back primer and then apply MS polymer adhesive.

Front side can also be mounted with black screws in case e.g. ceiling fixing assured fixing is required.

In the openings of the wooden framework should be filled with a sound-absorbing material (e.g. rock wool or Primawool).




The 4 sides of the board should preferably be supported by the battens. At impact-sensitive areas, we recommend longitudinal joints of 2 boards on a common battens behind.

End connections of 2 panels are mounted on a common underlying batten with an intermediate joint of 2 to 3 mm.



We recommend working with a clearance of at least 1 mm per running meter to allow for possible expansion; and this over the total height and/or width of the wall.

On request, you can receive specific installation regulations and certificates for walls where increased impact is likely (sports halls, party halls, ...) according to standard ETAG 003 & EN 13964.

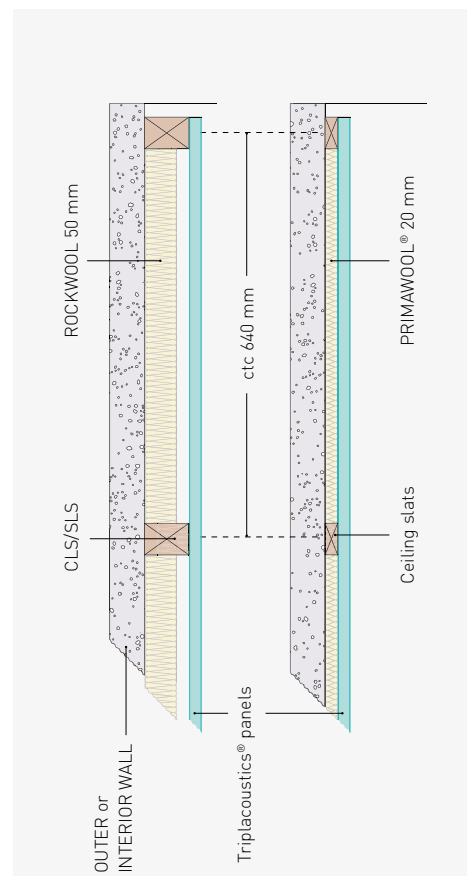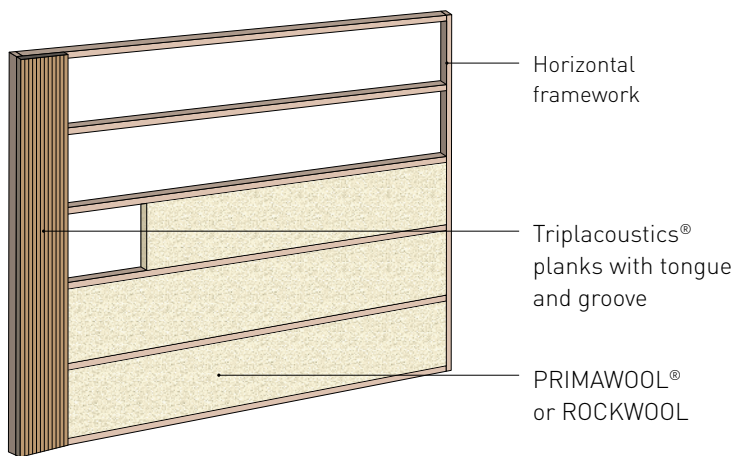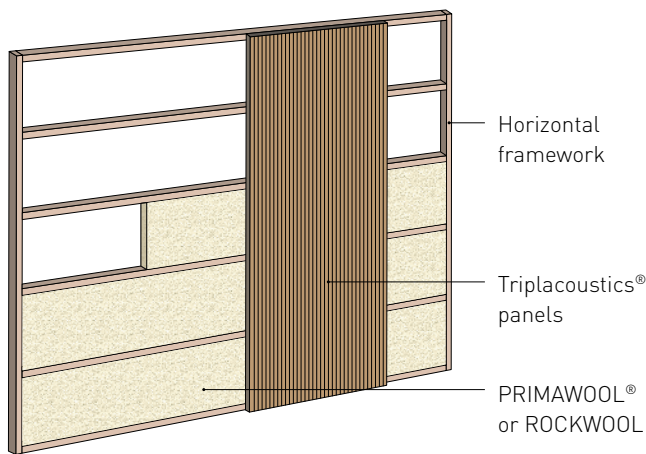

TEST SET-UP IN LABORATORY:

TOTAL THICKNESS WALLS


88/90 mm

TOTAL THICKNESS WALLS


38/40 mm

inspiration corner + plinths


Corner solutions

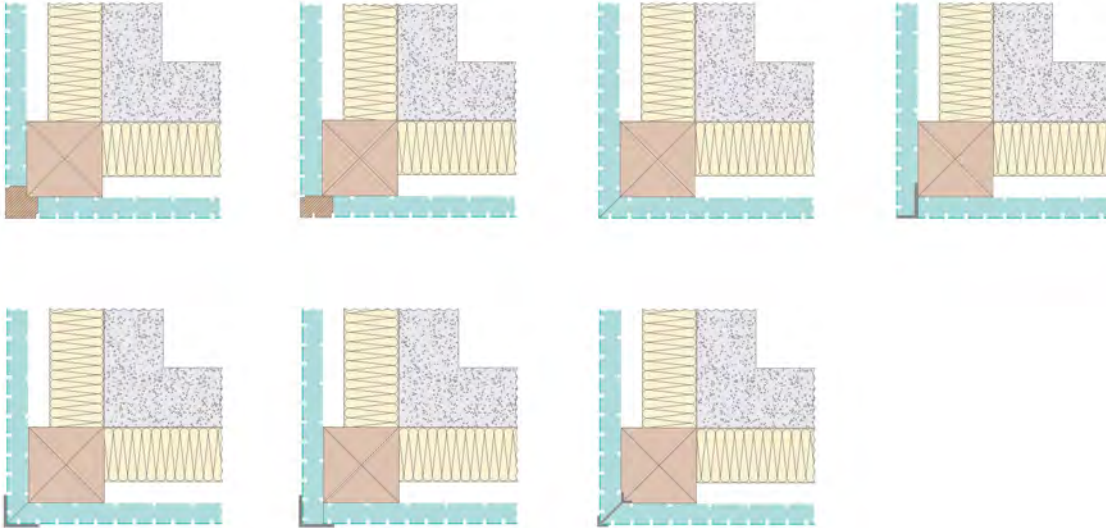

Wall connections

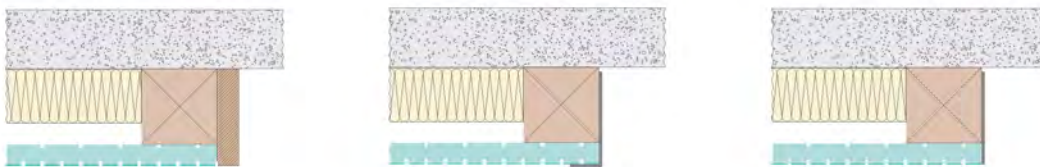


Floor connections

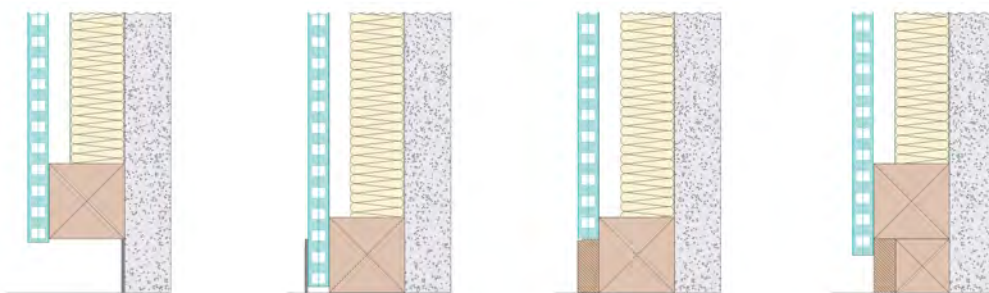

*

Ceiling LED line




- Primawool or rockwool
- Triplacoustics panel
- wooden structure
- wall
- profile available at specialist shop
- decorative full panel material or massive wood
- LED line

* Required plinth position in case of type F or Ds

installation patterns

There are different possible installation patterns for panels and planks.
A couple of examples of patterns with planks are given in the drawings below.

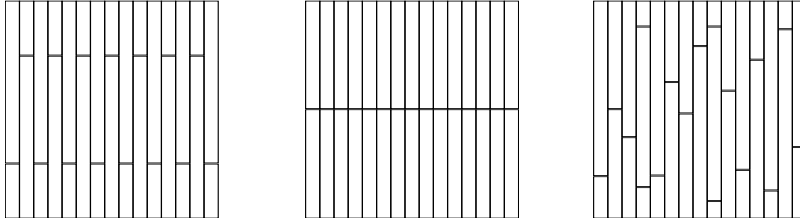

Primawool®

Description

- > Low density absorber
- > 100% polyester fibre
- > 1-sided drum membrane: white
- > Colour of polyester fibre: white
- > Applications: walls, ceilings and baffle filling

Features

- > 100 % recyclable PET
- > Inodorous
- > No emission of volatile organic compounds (VOCs) (A+ level)
- > Moisture and rot resistant
- > Non irritating for skin and eyes
- > European fire class B-s2-d0


Figures

Density ISO 9073-1
 Thickness E0 (without load) ISO 9073-2
 Thickness E1 (load of 50g/50cm²)
 Thickness E10 (load of 500g/500cm²)
 Inflammability FMVSS 302
 Dimensions of roll (length / width / width tolerances)
 Package

450 gr/m²
 22 mm (measured without package)
 21 mm (measured without package)
 13 mm (measured without package)
 <100 mm/min (self-extinguishing)
 30 m / 600 mm / -0 +2 cm
 36 m² (2 separate rolls of 30 m)


Acoustic features

Absorption coefficient is determined by measuring a sample of PRIMAWOOL® in the reverberation room.

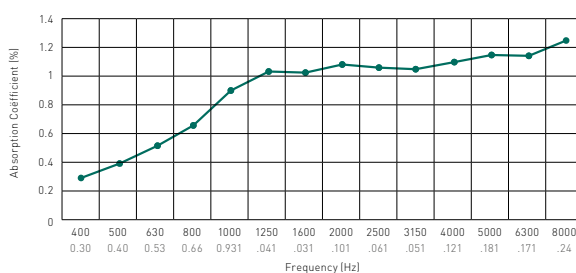

Installation PRIMAWOOL®

Installation in a framework with vertical or horizontal slats.

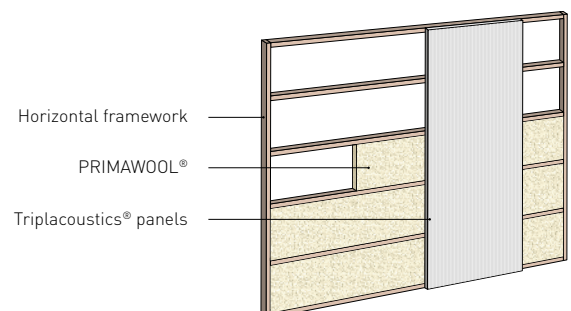

made-to-measure solutions




Acou Sliding door elements

Triplacoustics can produce Made To Measurement acoustic absorbing cupboard door elements with straight top-running and bottom guiding system. Both sides of the door elements are Type Db, Dr, Dw, I, M, N and the core has a full frame filled with Primawool.
Total Thickness $\pm 60\text{mm}$



Cladding panels for interior doors (non acou)


We can deliver 'false' acou panels for cladding of an interior door. This to preserve the esthetics of the project. These panels are delivered full oversize and are to be glued on an existing door.
extra thickness $\pm 11\text{mm}$



Curved walls & ceilings

Our acoustic panels can be installed in various ways on a curved back structure. Which producten and which radii are possible can be found in the overview in our catalog on pages 76 and 77.

catalog



Akoest-object

You can also opt for acoustic baffles to absorb the sound in a room. These baffles are available as individual wall or ceiling elements. They can be made to measure on the basis of all our types.



Akoest-lambris

All walls/ceilings are available in woodpanelling non acou on request
> 0% Perforation (no absorption)
> On full black core board
Can be used as outer corner panel



Akoest-box-type

On request, we can deliver frames (colour-coordinated or otherwise) in veneer, HPL or solid timber on various depths and widths. Assembled or loose.



storage and handling of finished panels

The acoustic panels/planks can be mounted horizontally and vertically. For conditioning, we recommend to store the panels in the room at least 48 hours before mounting them. These panels are by nature and composition only to be mounted in a well-conditioned room with a relative humidity between 35 and 55 % and a temperature between 14 and 30 °C. Large temperature and humidity differences between front and plenum are not allowed.


Flat storage with larger cover plate

Handle with care (delicate panels)

Larger cover plate than
the Triplacoustics® panels.



type Z wall-ceiling

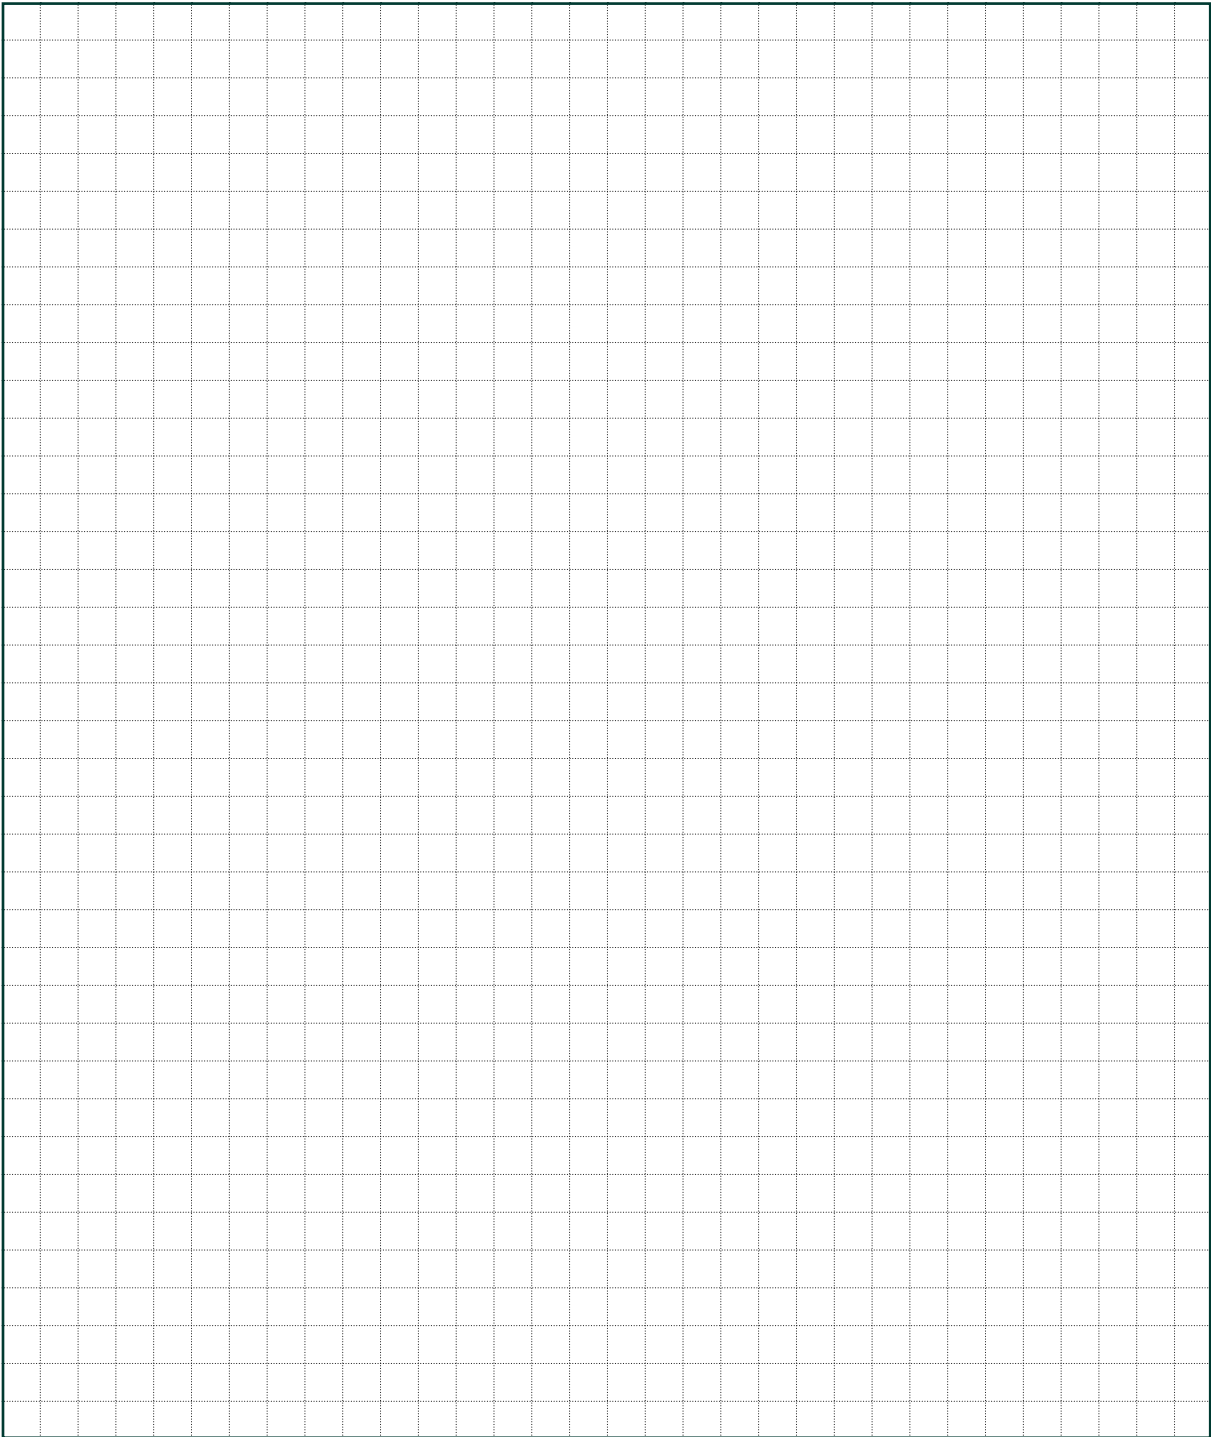

tripla 
coustics

YOUR SILENT PARTNER

PRINT 
ACOUSTICS

WOOD 
COUSTICS

BI 
COUSTICS

Triplacoustics is a TRIPLACO brand

Generaal Deprezstraat 2, 8530 Harelbeke - Belgium

T +32 56 22 62 17 | F +32 56 22 98 15 | info@triplacoustics.be | www.triplacoustics.be